

Nordic Heavy Duty LED

CANIS LED N2001




- Ultra compact & lightweight.
- Extensive multi-voltage.
- Extreme shock resistance.
- Over voltage, over temperature, spike & polarity protected.
- Environmentally sealed – IP68, IP6K9K.
- Robust cast alloy body.
- TE DEUTSCH compatible connector encapsulated in body.
- 5-year warranty.

Theoretical Lumen Output :	1,600lm
Operating Lumen Output :	1,000lm
Operational Voltage :	9-68V
Current Draw :	0.25A @ 48V
Max Power Consumption :	13W
LED Lifetime :	50,000 Hrs
Connector :	DT Style – 2 Pin
Mount :	Single Bolt M10
Shock :	60G
Vibration :	15.3G rms 24-2000Hz
Lens :	Polycarbonate
Body :	Aluminium
Weight :	0.6kg
Ingress Protection :	IP68, IP6K9K
Salt Mist :	ISO 9227
EMC :	ISO 13766, ISO 14982, ISO 7637-2
Operating Temperature :	-40°C to 85°C
Colour Temperature :	5700K
Light Source :	Single Lumileds® Luxeon M LED



Supplied with genuine TE DEUTSCH 2 pin connector

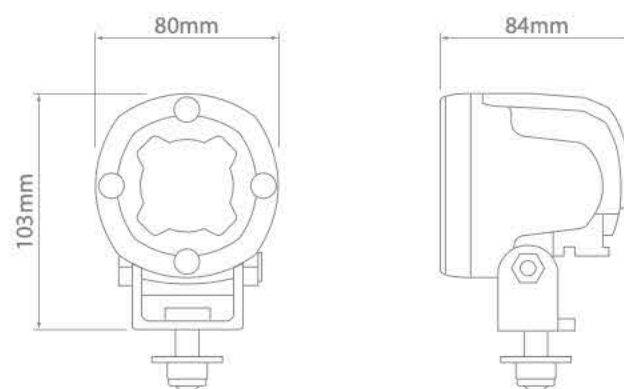

Nordic Heavy Duty LED

CANIS LED N2001 – Wide Flood

Part No.

980-101

Operational Voltage

9-68

